




T81806

## TECHNICAL DATA

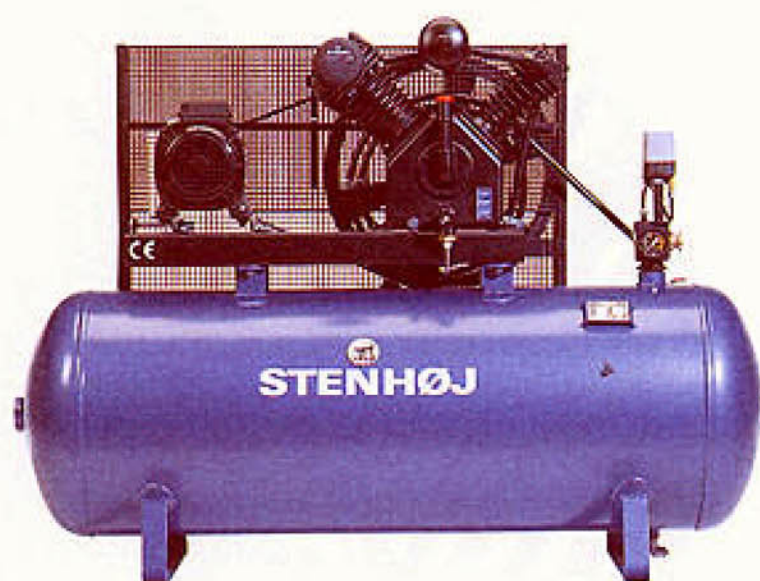

### STATIONARY COMPRESSOR UNITS - MAX. 10 BAR.

Designation	Receiver volume	F.A.D.* l/min.	Displacement l/min.	R.P.M.	Motor		Dimensions mm.			Weight
					kW	HP	L	B	H	
KA4F	50	60	91	1330	0,55	0,75	480	450	870	58
KA3F	90	90	122	890	0,75	1,0	1230	390	890	115
KA3F	150	90	122	890	0,75	1,0	1260	430	980	140
KA3G	50	112	157	1145	1,1	1,5	1230	318	828	100
KA3G	90	112	157	1145	1,1	1,5	1230	390	890	115
KA3G	150	112	157	1145	1,1	1,5	1260	430	980	140
KA25B	150	205	235	1220	1,5	2,0	1260	430	930	150
KA25B	275V	205	235	1220	1,5	2,0	750	600	1670	200
KA25B	280	205	235	1220	1,5	2,0	1560	500	1060	240
KA66B	150	270	400	1040	2,2	3,0	1260	430	930	150
KA66B	275L	270	400	1040	2,2	3,0	750	600	1670	200
KA66B	280	270	400	1040	2,2	3,0	1560	500	1060	240
KA66A	90	310	475	1235	3,0	4,0	1190	410	870	135
KA66A	150	310	475	1235	3,0	4,0	1260	430	930	150
KA66A	275V	310	475	1235	3,0	4,0	750	600	1670	200
KA66A	280	310	475	1235	3,0	4,0	1560	500	1060	240
KA11A	275V	500	638	610	4,0	5,5	960	600	1730	270
KA11A	280	500	638	610	4,0	5,5	1560	530	1120	240
KA11A	500	500	638	610	4,0	5,5	1890	600	1230	343
KA112C	500	720	800	765	5,5	7,5	1890	600	1310	387
KA112C	1000	720	800	765	5,5	7,5	1880	865	1550	415
KA112F	500	870	957	925	7,5	10,0	1890	600	1310	387
KA112F	1000	870	957	925	7,5	10,0	2020	863	1580	500
KA20B	500	935	1039	850	7,5	10,0	1890	640	1410	449
KA20B	1000	935	1039	850	7,5	10,0	2020	863	1680	580
KA22C	500	1380	1808	740	11,0	15,0	1890	640	1410	493
KA22C	1000	1380	1808	740	11,0	15,0	2020	863	1680	600

V = Vertical

\* Free air delivery at 50° C, absolute inlet pressure 1 bar and inlet temperature 20° C.  
Working pressure of the compressor 80% of max. pressure.

No liability accepted for specifications which are subject to alteration.



# STENHØJ

+45 7662 1260

E-mail: [kompessor@stenhoj.dk](mailto:kompessor@stenhoj.dk)

Homepage: [www.stenhoj.dk](http://www.stenhoj.dk)

981101



T81807

## TECHNICAL DATA



### STATIONARY COMPRESSOR UNITS - MAX. 15 BAR.

Designation	Receiver volume	F.A.D.* l/min.	Displacement l/min.	R.P.M.	Motor		Dimensions mm.			Weight
					kW	HP	L	B	H	
KA25A	90	185	218	1130	1,5	2,0	1190	410	870	143
KA25A	150	185	218	1130	1,5	2,0	1260	430	930	140
KA25A	275V	185	218	1130	1,5	2,0	750	600	1670	200
KA25A	280	185	218	1130	1,5	2,0	1560	500	1060	240
KA13B	275V	360	380	725	3,0	4,0	950	600	1730	276
KA13B	280	360	380	725	3,0	4,0	1560	530	1120	250
KA13B	500	360	380	725	3,0	4,0	1850	600	1240	325
KA13C	275V	450	478	925	4,0	4,5	950	600	1730	276
KA13C	280	450	478	925	4,0	5,5	1560	530	1120	250
KA13C	500	450	478	925	4,0	5,5	1930	600	1230	348
KA112A	500	630	690	660	5,5	7,5	1890	600	1310	387
KA112B	500	796	900	860	7,5	10,0	1890	600	1310	387
KA112B	1000	796	900	860	7,5	10,0	2020	863	1580	500
KA20A	500	770	855	700	7,5	10,0	1890	640	1410	449
KA20F	500	1100	1222	1000	11,0	15,0	1890	640	1410	449
KA20F	1000	1100	1222	1000	11,0	15,0	2020	863	1680	580

V = Vertical

\* Free air delivery at 50° C, absolute inlet pressure 1 bar and inlet temperature 20° C.  
Working pressure of the compressor 80% of max. pressure.

No liability accepted for specifications which are subject to alteration.



# STENHØJ

☎ +45 7682 1260

E-mail: kompressor@stenhoj.dk


Homepage: www.stenhoj.dk

981101



T81808

## TECHNICAL DATA

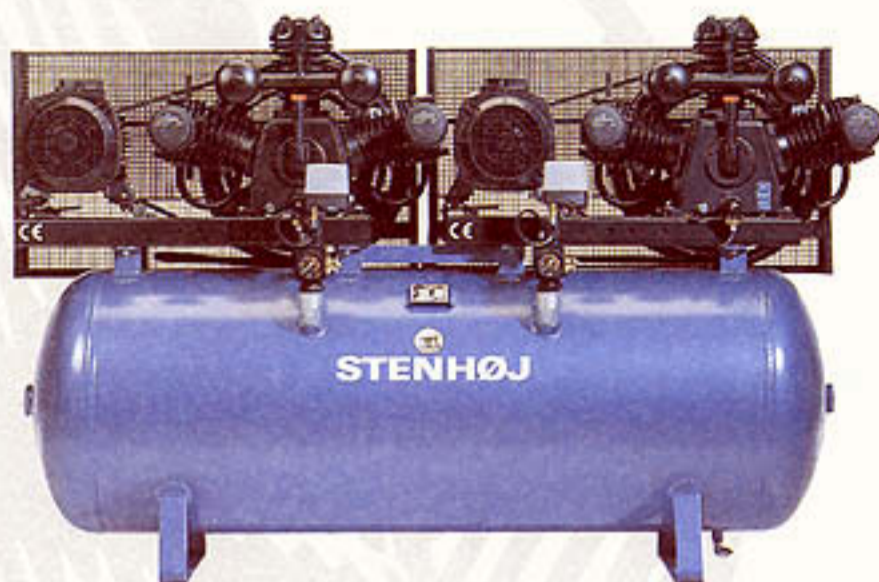

### DOUBLE UNITS - MAX. 10 BAR.

Designation	Receiver volume	F.A.D.* l/min.	Displacement l/min.	R.P.M.	Motor		Dimensions mm.			Weight
					kW	HP	L	B	H	
KA3GD	280	224	314	1145	2 x 1,1	2 x 1,5	1540	500	1110	280
KA25BD	280	410	470	1220	2 x 1,5	2 x 2,0	1540	500	1060	300
KA11AD	500	1000	1276	610	2 x 4,0	2 x 5,5	1930	600	1230	455
KA112CD	500	1440	1600	765	2 x 5,5	2 x 7,5	2020	600	1310	572
KA112FD	500	1740	1914	925	2 x 7,5	2 x 10	2020	600	1310	572
KA112FD	1000	1740	1914	925	2 x 7,5	2 x 10	2020	863	1580	700
KA20BD	500	1870	2070	850	2 x 7,5	2 x 10	2240	640	1400	797
KA22CD	500	2760	3616	740	2 x 11	2 x 15	2170	640	1400	612
KA22CD	1000	2760	3616	740	2 x 11	2 x 15	2170	863	1680	900

### DOUBLE UNITS - MAX. 15 BAR.

KA13CD	500	900	956	915	2 x 4,0	2 x 5,5	1930	600	1230	450
KA112AD	500	1260	1380	660	2 x 5,5	2 x 7,5	2020	600	1310	467
KA112BD	500	1592	1800	860	2 x 7,5	2 x 10	2020	600	1310	474
KA112BD	1000	1592	1800	860	2 x 7,5	2 x 10	2060	865	1550	690
KA20AD	500	1540	1710	700	2 x 7,5	2 x 10	2240	640	1400	769
KA20AD	1000	1540	1710	700	2 x 7,5	2 x 10	2240	865	1670	832
KA20FD	500	2200	2450	1000	2 x 11	2 x 15	2240	640	1400	767
KA20FD	1000	2200	2450	1000	2 x 11	2 x 15	2240	865	1670	892

\* Free air delivery at 50° C, absolute inlet pressure 1 bar and inlet temperature 20° C.  
Working pressure of the compressor 80% of max. working pressure.

No liability accepted for specifications which are subject to alteration.



# STENHØJ

+45 7682 1260

E-mail: kompressor@stenhoj.dk

Homepage: www.stenhoj.dk

981101